RENESAS

embeddedworld
Exhibition&Conference

Content of Press Kit

Download: https://presse.hbi.de/pub/Renesas/Presskits/EW2024/

| News releases in English, German, French & Italian	Images
REN2415 **Renesas Introduces New Entry-Level RA0 MCU Series with Best-in-Class Power Consumption**	New RA0 Arm® MCUs Reduce Power Consumption, Lower BOM Cost and Simplify Design Cycle
REN2414 **Renesas Expands Quick Connect Studio with Real-Time Code Customization, Remote Debugging and Broad Portfolio of Supported Devices**	Renesas Expands Quick-Connect Studio with Real-Time Code Customization, Remote Debugging
REN2413 **Renesas Introduces Industry's First General-Purpose 32-bit RISC-V MCUs with Internally Developed CPU Core**	New RISC-V MCU with Renesas Core Strengthens Global Ecosystem
REN2412 **New Renesas MCUs with High-Resolution Analog and Over-the-Air Update Support Help Customer Systems Conserve Energy**	Rich Analog Features and Low-Power Consumption for Global Energy Management and Industrial Applications

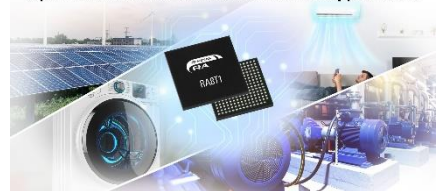| News releases in English, German, French & Italian	Images
REN2409 **Renesas Unveils Powerful Single-Chip RZ/V2H MPU for Next-Gen Robotics with Vision AI and Real-Time Control**	 RZ/V2H MPU with Integrated AI Accelerator Achieves High Power Efficiency and Real-Time Performance
REN2408 **Renesas Develops New AI Accelerator for Lightweight AI Models and Embedded Processor Technology to Enable Real-Time Processing**	
REN2405 **Renesas Brings Industry-Leading Performance of RA8 Series MCUs to Motor Control Applications**	 RA8T1 High-Performance Arm® Cortex®-M85 MCUs Optimized for Motor Control and Inverter Applications
REN2404 **Renesas' New Four-Channel Video Decoder for Automotive Cameras Enables Economical Surround View Applications**	 RAA279974 4-Channel AHL Video Decoder Enables Economical Surround View Applications
REN2403 **Renesas Debuts Its Lowest Power Consumption, Dual-core Bluetooth Low Energy SoC with Integrated Flash**	 DA14592 Bluetooth LE SoC extends product operating life
REN2401 **Renesas Launches RZ/G3S 64-bit Microprocessor with Enhanced Peripherals for IoT Edge and Gateway Devices**	 Low-Power 64-bit RZ/G3S MPU Extends Battery Life of IoT Gateway Devices